

Performance UltraTile

Rubber Tiles for Ultimate Durability

Performance UltraTile® is designed with a patented “ultra” high-density surface layer on a molded base. This 24-by-24-by-1-inch modular tile offers enhanced impact absorption in moderate to extreme weight drop applications.

BUILT ON
itsTRU
TECHNOLOGY

Product Attributes

- **2.5mm Vulcanized Composition Rubber (VCR) Surface Layer**
Provides excellent durability and slip resistance
- **1" Molded VCR UltraTile Base Layer***
Upcycled VCR molded base layer provides extreme shock absorption and subrate protection


*Installed using Ecore's Quad Blok installation system. Quad Bloks allow the flooring system to float and the tiles to be installed in conjunction with RageTurf UltraTiles.

Nominal Dimensions

Available as a standard in tiles. Talk to your local sales rep to determine availability, pricing, minimums, and lead times. **See the Tech Manual and Guide Specs** for installation instructions and product specifications.



1" x 24" (61 cm) x 24" (61 cm)





Quad Blok: 1/2" H x 4 3/4" x 4 3/4"
Adhesive = 1 28oz Tube / 40 Quad Bloks

Applications

- Selectorized Strength
- Free Weights
- Cardio
- Olympic Style Lifting
- Functional Training
- Childcare / Playzones
- K-12 / Higher Education
- Outdoor (must be fully adhered)

Benefits

- Durable
- Easy installation with Quad Blok installation system
- Ease of maintenance
- Slip-resistant
- Custom logos available

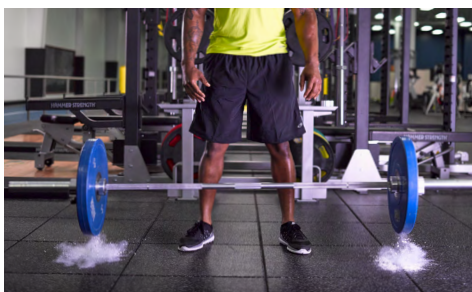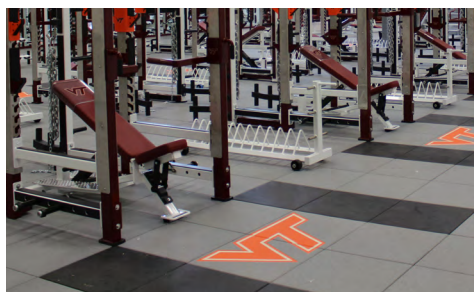

NRG




Force Reduction: 50.2%
Absorption of impact energy




Energy Restitution: 47.9%
Useful return of impact energy

Typical Deltec Field Tester Results


Color Swatches




Medium Gray ES504




Charcoal ES505




Dark Taupe ES506




Warm Gray ES507




Navy ES508



Green ES509



Maroon ES510



Red ES511




Steel Appeal 2 ES15A




Dark Gray ES502




Mocha Latte 2 ES43A




Blue ES500




Blue Jays ES103




Cardinals ES104



Raiders ES503




Buff Blue 20 ES45



Rippin Red 20 ES47




Grippin Gray 20 ES46



Whey Protein 2 ES97A




Rustic Edge ES512



Raw Titanium ES513



Forged Steel ES514



Urban Slate ES515



Jet Black ES00

Technical Details

Performance Criteria	Test Standard	Typical Results
Recovery after Static Load (@400psi)	ASTM F970	0.005"
Coefficient of Friction	ASTM D2047	>0.8
FloorScore	CA 01350	Certified
Abrasion Resistance	ASTM D3389	Pass
Flammability- Pill Test	ASTM D2859	Pass
Impact Insulation Class (IIC)*	ASTM E492	56
Delta IIC*	ASTM E2179	27

*Tested on a 6" concrete slab with no ceiling.